

ICE60

MOVING HEAD SPOT *TM*

WIRELESS DMX
WiCICLE®
ENABLED



Blizzard Lighting, LLC
www.blizzardlighting.com
Wisconsin, USA
Copyright (c) 2012

TABLE OF CONTENTS

ICE 60™ 60W LED Moving Head Spot	1
1. Getting Started	3
What's In The Box?	3
Getting It Out Of The Box	3
Powering Up!	3
Getting A Hold Of Us	3
Safety Instructions (Don't Stick Your Hand In The Toaster!)	4
2. Meet The ICE 60™ Spot	5
Features	5
DMX Quick Reference	5
The ICE 60 Pin-up Picture	6
3. Setup	7
Fuse Replacement	7
Connecting A Bunch Of ICE 60's™	7
Data/DMX Cables	7
Cable Connectors	8
3-Pin??? 5-Pin??? Huh?	8
Take It To The Next Level: Setting up DMX Control	8
Fixture Linking (Master/Slave Mode)	9
Mounting/Rigging	9
Using this fixture with the wiCICLE® Wireless DMX System	10
4. Operating Adjustments	12
The Control Panel	12
Control Panel Menu Structure & Adjustments	12
Setting the pan/tilt/Menu to inverting or non-inverting	12
Setting the DMX channel configuration	12
Setting the maximum pan angle	12
Setting the maximum tilt angle	12
Additional User Adjustments	12
Service Functions	13
Resetting the fixture	13
Restoring Factory Defaults	13
Stand-Alone ("Auto") Mode	13
Master/Slave ("Auto" or "Sound Active")	13
DMX Mode	13
Gobo Replacement	13
DMX Channel Values In-Depth	14
Troubleshooting	16
5. Appendix	17
A Quick DMX Lesson	17
Keeping Your ICE 60 Spot As Good As New	18
Returns (Gasp!)	18
Shipping Issues	18
Tech Specs	19

1. GETTING STARTED

What's In The Box?

- 1 x ICE 60™ Spot
- An Ever-So-Handy Power Cord
- A Sweet Safety Cable & set of Mounting Brackets
- This Lovely User Manual

Getting It Out Of The Box

You're as cool as ice... but not willing to sacrifice your love... for a great LED moving head fixture! Now that you've got your ICE 60, you should carefully unpack the box and check the contents to ensure that all parts are present and in good condition. If anything looks as if it has been damaged in transit, notify the shipper immediately and keep the packing material for inspection. Again, please save the carton and all packing materials. If a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

Powering Up!

All fixtures must be powered directly off a switched circuit and **cannot be run off a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel is used solely for a 0% to 100% switch.**

AC Voltage Switch - Not all fixtures have a voltage select switch, so please verify that the fixture you receive is suitable for your local power supply. See the label on the fixture or refer to the fixture's specifications chart for more information. A fixture's listed current rating is its average current draw under normal conditions. Check the fixture or device carefully to make sure that if a voltage selection switch exists that it is set to the correct line voltage you will use.

Warning! Verify that the voltage select switch on your unit matches the line voltage applied. Damage to your fixture may result if the line voltage applied does not match the voltage indicated on the voltage selector switch. All fixtures must be connected to circuits with a suitable Ground (Earthing).

Getting A Hold Of Us

If something is wrong, just give us a call or send an email. We'll be happy to help, honest.

Blizzard Lighting

W220 N1531 Jericho Ct. Suite E, Waukesha, WI 53186 USA

support@blizzardlighting.com | Phone: 866-493-6025

www.blizzardlighting.com

SAFETY INSTRUCTIONS



Please read these instructions carefully. They include important information about the installation, usage and maintenance of this product.

- Please keep this User Guide for future use. If you sell the unit to someone else, be sure that they also receive this User Guide.
- ALWAYS make sure that you are connecting to the proper voltage, and that the line voltage you are connecting to is not higher than that stated on the decal or rear panel of the fixture.
- This product is intended for indoor use only.
- To prevent risk of fire or shock, do not expose fixture to rain or moisture.
- Make sure there are no flammable materials close to the unit while operating.
- The unit must be installed in a location with adequate ventilation, at least 20in (50cm) from adjacent surfaces. Be sure that no ventilation slots are blocked.
- ALWAYS disconnect from the power source before servicing or replacing fuse and be sure to replace with same fuse size and type.
- ALWAYS secure fixture using a safety chain. NEVER carry the fixture by its head. Use its carrying handles.
- DO NOT operate at ambient temperatures higher than 104°F (40°C).
- In the event of a serious operating problem, stop using the unit immediately. NEVER try to repair the unit by yourself. Repairs carried out by unskilled people can lead to damage or malfunction. Please contact the nearest authorized technical assistance center. Always use the same type spare parts.
- NEVER connect the device to a dimmer pack.
- Make sure the power cord is never crimped or damaged.
- Never disconnect the power cord by pulling or tugging on the cord.
- Avoid direct eye exposure to the light source while it is on.

Caution! There are no user serviceable parts inside the unit. Do not open the housing or attempt any repairs yourself. In the unlikely event your unit may require service, please contact Blizzard Lighting at support@blizzardlighting.com.

2. MEET THE ICE 60™ SPOT

CONTROL FEATURES

- 10 or 15-channel DMX LED moving yoke
- Pan: 540°/360°/180° Tilt: 270°/180°/90°
- Color wheel: 7 colors + white
- Rainbow color spin at variable speeds
- Rotating gobo wheel with gobo shake
- 6 interchangeable, rotating slot-n-lock gobos + open (1 glass installed)
- 8 fixed gobos
- Gobo wheel spin at variable speeds
- 3-facet rotating prism
- Variable electronic strobe
- Variable electronic dimmer (0 – 100%)
- Remote focus via DMX (2m~infinity)
- Remote fixture reset
- Multiple built-in automated & sound activated programs

ADDITIONAL FEATURES

- Lux: 29,890 @ 1m, 7,750 @2m
- Gobo size: 27.9mm outside, 23mm image, 1.2mm max thickness
- Beam Angle: 14°
- Light source: 60W White LED, 50,000 hrs

DMX Quick Reference

Channel	What It Does... (15 Channel)	(10 Channel Mode)
1	Pan	Pan
2	Tilt	Tilt
3	Pan Fine (16-Bit)	Color
4	Tilt Fine (16-Bit)	Fixed Gobos
5	Motor Speed	Rotating Gobos
6	Color	Gobo Rotation
7	Fixed Gobos	Strobe
8	Rotating Gobos	Dimmer
9	Gobo Rotation	Prism
10	Shutter/Strobe	Focus
11	Dimmer	
12	Functions	
13	Movement Macros	
14	Prism	
15	Focus	

Figure 1: The ICE 60 Pin-Up Picture



Figure 2: The Rear Connections




3. SETUP



Before replacing a fuse, disconnect power cord. ALWAYS replace with the same type and rating of fuse.

Fuse Replacement

With a flat head screwdriver, wedge the fuse holder out of its housing. Remove the damaged fuse from its holder and replace with exact same type fuse. Insert the fuse holder back in its place and reconnect power.



Connecting A Bunch of ICE 60™eseses

You will need a serial data link to run light shows using a DMX-512 controller or to run shows on two or more fixtures set to sync in master/slave operating mode. The combined number of channels required by all the fixtures on a serial data link determines the number of fixtures the data link can support.

Fixtures on a serial data link must be daisy chained in one single line. Also, connecting more than 32 fixtures on one serial data link without the use of a DMX optically-isolated splitter may result in deterioration of the digital DMX signal.

The maximum recommended cable-run distance is 500 meters (1640 ft). The maximum recommended number of fixtures on a serial data link is 32 fixtures.

Data/DMX Cabling

To link fixtures together you'll need data cables. You should use data-grade cables that can carry a high quality signal and are less prone to electromagnetic interference.

For instance, Belden© 9841 meets the specifications for EIA RS-485 applications. Standard microphone cables will "probably" be OK, but note that they cannot transmit DMX data as reliably over long distances. In any event, the cable should have the following characteristics:

2-conductor twisted pair plus a shield

Maximum capacitance between conductors – 30 pF/ft.


Maximum capacitance between conductor & shield – 55 pF/ft.

Maximum resistance of 20 ohms / 1000 ft.

Nominal impedance 100 – 140 ohms


Cable Connectors

Cables must have a male XLR connector on one end and a female XLR connector on the other end. (Duh!)



A Word on Termination: DMX is a resilient communication protocol, however errors still occasionally occur. Termination reduces signal errors, and therefore best practices include use of a terminator in all circumstances. If you are experiencing problems with erratic fixture behavior, especially over long signal cable runs, a terminator may help improve performance.

To build your own DMX Terminator:
Obtain a 120-ohm, 1/4-watt resistor, and wire it between pins 2 & 3 of the last fixture. They are also readily available from specialty retailers.



CAUTION: Do not allow contact between the common and the fixture's chassis ground. Grounding the common can cause a ground loop, and your fixture may perform erratically. Test cables with an ohm meter to verify correct polarity and to make sure the pins are not grounded or shorted to the shield or each other.

3-Pin??? 5-Pin??? Huh?!?

If you use a controller with a 5 pin DMX output connector, you will need to use a 5 pin to 3 pin adapter. They are widely available over the internet and from specialty retailers. If you'd like to build your own, the chart below details a proper cable conversion:


Conductor	3-Pin Female (Output)	5-Pin Male (Input)
Ground/Shield	Pin 1	Pin 1
DMX Data (-)	Pin 2	Pin 2
DMX Data (+)	Pin 3	Pin 3
Not Used.	No Connection.	No Connection.
Not Used.	No Connection.	No Connection.

Take It To The Next Level: Setting Up DMX Control

Step 1: Connect the male connector of the DMX cable to the female connector (output) on the controller.




Step 2: Connect the female connector of the DMX cable to the first fixture's male connector (input). *Note:* It doesn't matter which fixture address is the first one connected. We recommend connecting the fixtures in terms of their proximity to the controller, rather than connecting the lowest fixture number first, and so on.

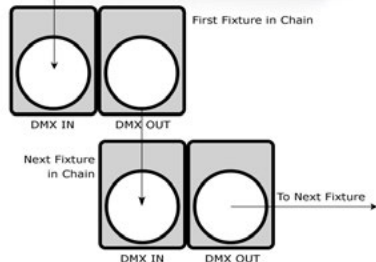

Step 3: Connect other fixtures in the chain from output to input as above. Place a DMX terminator on the output of the final fixture to ensure best communication.

Fixture Linking (Master/Slave Mode)

1. Connect the (male) 3 pin connector side of the DMX cable to the output (female) 3 pin connector of the first fixture.
2. Connect the end of the cable coming from the first fixture which will have a (female) 3 pin connector to the input connector of the next fixture consisting of a (male) 3 pin connector. Then, proceed to connect from the output as stated above to the input of the following fixture and so on.

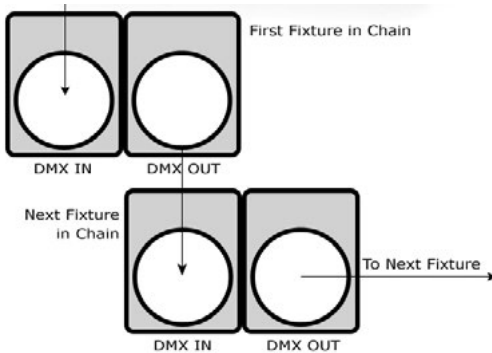

A quick note: Often, the setup for Master-Slave and Standalone operation requires that the first fixture in the chain be initialized for this purpose via either settings in the control panel or DIP-switches. Secondly, the fixtures that follow may also require a slave setting.

Check the **“Operating Adjustments”** section in this manual for complete instructions for this type of setup and configuration.

Mounting & Rigging

This fixture may be mounted in any SAFE position provided there is enough room for ventilation.

It is important never to obstruct the fan or vents pathway. Mount the fixture using a suitable “C” or “O” type clamp. The clamp should be rated to hold at least 10x the fixture’s weight to ensure structural stability. Do not mount to surfaces with unknown strength, and ensure properly “rated” rigging is used when mounting fixtures overhead.

Adjust the angle of the fixture by loosening both knobs and tilting the fixture. After finding the desired position, retighten both knobs.

- When selecting installation location, take into consideration lamp replacement access (if applicable) and routine maintenance.
- Safety cables **MUST ALWAYS** be used.
- Never mount in places where the fixture will be exposed to rain, high humidity, extreme temperature changes or restricted ventilation.

USING THIS FIXTURE WITH THE wiCICLE® WIRELESS DMX SYSTEM

In addition to the unbridled thrill you already received the first time you plugged in your fixture, you'll be delighted to know that This fixture also works seamlessly with our wiCICLE® Wireless DMX system, **without additional power.**




- ONLY fixtures bearing this logo are certified for use with the wiCICLE® without external power.

- **Unauthorized modification and/or using the wiCICLE® with unapproved fixtures may cause damage to the wiCICLE® or fixture. UNDER NO CIRCUMSTANCES IS BLIZZARD LIGHTING RESPONSIBLE FOR ANY DAMAGE FROM SUCH OPERATION.**

- Fixtures bearing the above logo **MUST** only use cable and connectors which separate chassis/case ground from cable shielding. Cabling with the shield connected to the connector's case/chassis may cause malfunction and damage to the wiCICLE® or fixture.

- wiCICLE® transmitters have additional power requirements and therefore cannot be powered directly from the fixture. You will need to utilize the supplied AC/DC adaptor to drive wiCICLE® transmitters in your system.

WE HAD THIS SPACE, SO WE FIGURED WE'D DRAW YOU A PICTURE:

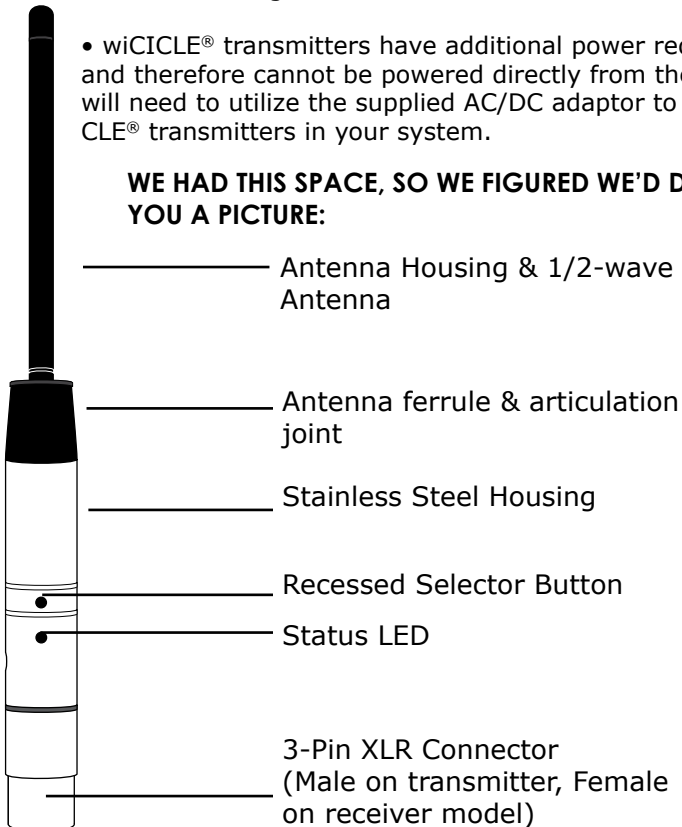

Each wiCICLE® acts as both a transmitter and a receiver, depending on whether a DMX source is applied to the integral XLR connector. This is an extremely powerful feature of the system, however, it also requires 1 piece of due diligence, and that is the removal of extraneous DMX signals from your lighting rig BEFORE proceeding.

SO: BEFORE DOING ANYTHING ELSE, YOU SHOULD DISABLE ANY BUILT-IN PROGRAMS IN THE FIXTURES YOU WISH TO CONNECT AND/OR SET THEM AS SLAVES PRIOR TO RETURNING THEM TO DMX MODE (IF APPLICABLE). Most fixtures contain a built-in automatic, sound active or custom program which is designed to operate with the fixture NOT connected to a DMX chain.

Some of these programs will automatically run unless the fixture is set to slave mode. These fixtures typically sense DMX automatically and switch to DMX mode upon receiving DMX signal (our Pucks do that!)

If you plug a wiCICLE® “receiver” into an autosensing fixture set as a “master, “chances are good that the wiCICLE® “receiver” will begin transmitting the master program. Most times, this is undesirable, and taking the two seconds to switch these programs off will solve a lot of ails.

Got that done? Good! Then let’s proceed!

1. Plug the wiCICLE® Receiver into the “DMX IN” connector of the fixture and verify it is receiving power (the **STATUS LED** should illuminate.)
2. Connect the AC/DC adaptor to the the wiCICLE® Transmitter and verify it is receiving power (the **STATUS LED** should illuminate.)
3. Press the **RECESSED SELECTOR BUTTON** on the Transmitter to select the operating channel group. (The system will store this setting for future use)

The 7-Color Status LED will change color to indicate the current channel group:

- GROUP 1: **RED**
- GROUP 2: **GREEN**
- GROUP 3: **YELLOW**
- GROUP 4: **BLUE**
- GROUP 5: **VIOLET**
- GROUP 6: **CYAN**
- GROUP 7: **WHITE**

NOTE: “GROUP” number also corresponds to the “GROUP” setting on our LightCaster™ wireless DMX Transceiver.

4. Follow the same procedure on the Receiver to select the channel group.
5. Once both the transmitter and receiver(s) are both set to the same channel group, connect the transmitter to the DMX controller or the DMX out of a fixture on your DMX chain.
6. Once a DMX signal is provided to the transmitter, the status LED will blink **RED** slowly until communication is established with the receiver. The status LED on the receiver(s) will flash **GREEN** slowly until communication is established.
7. Once the clearest channel is auto-selected, the status LEDs will blink quickly on both the transmitter and receiver. **NOTE:** The color of the LED DURING operation does not indicate channel group, instead it indicates whether the unit is transmitting or receiving. **That’s It!**

4. OPERATING ADJUSTMENTS

The Control Panel

All the goodies and different modes possible with the ICE 60™ are accessed by using the control panel on the front of the fixture. There are 4 control buttons below the LCD display which allow you to navigate through the various control panel menus.

MENU	ENTER	DOWN	UP
○	○	○	○

Button	Function
<MENU>	Used to access the menu or to return to a previous menu option
<ENTER>	Used to select and store the current menu or option within a menu
<DOWN>	Scrolls through menu options in descending order
<UP>	Scrolls through menu options in ascending order

Access control panel functions using the four panel buttons located directly underneath the LCD Display.

The Control Panel LCD Display shows the menu items you select from the menu map below. When a menu function is selected, the display will show immediately the first available option for the selected menu function. To select a menu item, press **<ENTER>**.

Use the **<UP>** and **<DOWN>** buttons to navigate the menu map and menu options. Press the **<ENTER>** button to access the menu function currently displayed or to enable a menu option. To return to the previous option or menu without changing the value, press the **<MODE>** button.

Control Panel Menu Structure

Main Function	Sub Function	Selection	What It Does...
Address	N/A	000 <-> 255	Sets the DMX address
Reset	N/A	Yes	Resets the fixture
Built-In	N/A	Auto Fast	Sets the fixture to Auto Mode - Fast
	N/A	Auto Slow	Sets the fixture to Auto Mode - Slow
	N/A	Audio	Sets the fixture to Sound Active Mode
	N/A	Slave	Sets the fixture as a slave - to follow another fixture set as master.
Reversal	Pan	Normal/Reversal	Reverses the fixture's pan movement
	Tilt	Normal/Reversal	Reverses the fixture's tilt movement
Degree	Pan	540°/360°/180°	Restricts the fixture's pan movement to the assigned value.
	Tilt	540°/360°/180°	Restricts the fixture's tilt movement to the assigned value.
Channel	N/A	15 CH / 10 CH	Sets the fixture to 15 channel (advanced) or 10 channel (basic) DMX personality
Load Data	N/A	Yes	Loads factory defaults

Additional User Adjustments

To restore all settings to their factory defaults:

- 1) Use the "Load Data" function in the menu (see page 12).

Operation

Master/Slave Mode (Master Sound, Master Auto):

This mode will allow you to link up to 32 units together without a controller.

1) Use standard DMX cables to daisy chain your units together via the DMX connector on the rear of the units. For longer cable runs we suggest a terminator at the last fixture.

2) Choose a unit to function as the Master. Turn dipswitches to the Master position on the unit. The unit must be the first unit in line. Then simply chain the units together using DMX cable.

Note: The master unit must be in one of the Auto or Sound modes. See the Menu Map for setting the options in the menu and navigating the Control Board.

3) Adjust the "Operation" to "Slave" on the slave units, and they will react the same as the Master unit.

Note: if you would like to have the fixtures inverted, this can be set in the Control board.

DMX Mode

This mode allows the unit to be controlled by any universal DMX controller. If you are unfamiliar with DMX, please read the DMX Primer section.


- 1) Set the menu to "Address."
- 2) Set your DMX starting address, and hit <ENTER> to confirm.

DMX Channel Values

The ICE 60™ has 2 DMX channel profiles (operation modes). These can be accessed in the Control Board.

Gobo Replacement

- 1) Remove the gobo cover by removing the two screws on the top of the fixture head.
- 2) Remove the slot-n-lock gobo from the gobo wheel by lifting up slightly and sliding it out.
- 3) Using a small tool, pry the tension ring from the gobo holder.
- 4) Remove the old gobo.
- 5) Insert the new gobo, and replace in the reverse steps of removal.

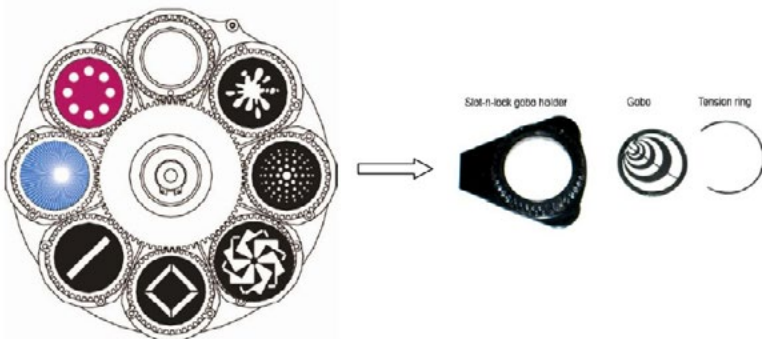

DMX Channel Values (10 Channel Mode)

Channel	Channel Value	Does...
1	000 <-> 255	Pan
2	000 <-> 255	Tilt
3	000 <-> 015 016 <-> 031 032 <-> 047 048 <-> 063 064 <-> 079 080 <-> 095 096 <-> 111 112 <-> 127 128 <-> 191 192 <-> 255	Color Open Red Green Blue Yellow Magenta Light Green Light Blue Color Scroll Clockwise (Slow <-> Fast) Color Scroll Counter-Clockwise (Fast <-> Slow)
4	000 <-> 006 007 <-> 013 014 <-> 020 021 <-> 027 028 <-> 034 035 <-> 041 042 <-> 048 049 <-> 055 056 <-> 062 063 <-> 069 070 <-> 076 077 <-> 083 084 <-> 090 091 <-> 097 098 <-> 104 105 <-> 111 112 <-> 118 119 <-> 125 126 <-> 192 193 <-> 255	Fixed Gobos (Gobo Wheel #2) Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo 7 Gobo 8 Gobo 8 Shake Gobo 7 Shake Gobo 6 Shake Gobo 5 Shake Gobo 4 Shake Gobo 3 Shake Gobo 2 Shake Gobo 1 Shake Open Gobo wheel Spin Clockwise (Slow <-> Fast) Gobo Wheel Spin Counter-Clockwise (Fast <-> Slow)
5	000 <-> 018 019 <-> 037 038 <-> 056 057 <-> 075 076 <-> 094 095 <-> 113 114 <-> 127 128 <-> 191 192 <-> 255	Rotating Gobos (Gobo Wheel #1) Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo Wheel Spin Clockwise (Slow <-> Fast) Gobo Wheel Spin Counter-Clockwise (Fast <-> Slow)
6	000 <-> 009 010 <-> 116 117 <-> 244 245 <-> 255	Gobo Rotation No function Clockwise (Slow <-> Fast) Counter-clockwise (Fast <-> Slow) Gobo Shake/Bounce
7	000 <-> 016 017 <-> 249 250 <-> 255	Strobe/Shutter Closed Strobe (Fast <-> Slow) Open
8	000 <-> 255	Dimmer 0 <-> 100%
9	000 <-> 015 016 <-> 239 240 <-> 255	Prism Prism Out Prism In, Rotating (Slow <-> Fast) Prism In, Stationary
10	000 <-> 255	Focus Near <-> Far

DMX Channel Values (15 Channel Mode)

Channel	Channel Value	Does...
1	000 <-> 255	Pan
2	000 <-> 255	Tilt
3	000 <-> 255	Pan Fine
4	000 <-> 255	Tilt Fine
5	000 <-> 255	X/Y Speed (Fast <-> Slow)
6	000 <-> 015 016 <-> 031 032 <-> 047 048 <-> 063 064 <-> 079 080 <-> 095 096 <-> 111 112 <-> 127 128 <-> 191 192 <-> 255	Color Open Red Green Blue Yellow Magenta Light Green Light Blue Color Scroll Clockwise (Slow <-> Fast) Color Scroll Counter-Clockwise (Fast <-> Slow)
7	000 <-> 006 007 <-> 013 014 <-> 020 021 <-> 027 028 <-> 034 035 <-> 041 042 <-> 048 049 <-> 055 056 <-> 062 063 <-> 069 070 <-> 076 077 <-> 083 084 <-> 090 091 <-> 097 098 <-> 104 105 <-> 111 112 <-> 118 119 <-> 125 126 <-> 192 193 <-> 255	Fixed Gobos (Gobo Wheel #2) Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo 7 Gobo 8 Gobo 8 Shake Gobo 7 Shake Gobo 6 Shake Gobo 5 Shake Gobo 4 Shake Gobo 3 Shake Gobo 2 Shake Gobo 1 Shake Open Gobo wheel Spin Clockwise (Slow <-> Fast) Gobo Wheel Spin Counter-Clockwise (Fast <-> Slow)
8	000 <-> 018 019 <-> 037 038 <-> 056 057 <-> 075 076 <-> 094 095 <-> 113 114 <-> 127 128 <-> 191 192 <-> 255	Rotating Gobos (Gobo Wheel #1) Open Gobo 1 Gobo 2 Gobo 3 Gobo 4 Gobo 5 Gobo 6 Gobo Wheel Spin Clockwise (Slow <-> Fast) Gobo Wheel Spin Counter-Clockwise (Fast <-> Slow)
9	000 <-> 009 010 <-> 116 117 <-> 244 245 <-> 255	Gobo Rotation No function Clockwise (Slow <-> Fast) Counter-clockwise (Fast <-> Slow) Gobo Shake/Bounce
10	000 <-> 016 017 <-> 249 250 <-> 255	Strobe/Shutter Closed Strobe (Fast <-> Slow) Open
11	000 <-> 255	Dimmer 0 <-> 100%
12	000 <-> 044 045 <-> 064 065 <-> 234 235 <-> 244 245 <-> 255	Functions No function Pan/tilt move-in-black No function Reset No function
13	000 <-> 255	Movement Macros
14	000 <-> 015 016 <-> 239 240 <-> 255	Prism Prism Out Prism In, Rotating (Slow <-> Fast) Prism In, Stationary
15	000 <-> 255	Focus Near <-> Far

Troubleshooting

Symptom	Solution
Fixture Auto-Shut Off	Check the fan in the fixture. If it is stopped or moving slower than normal, the unit may have shut itself off due to high heat. This is to protect the fixture from overheating. Clear the fan of obstructions, or return the unit for service.
Beam is Dim	Check optical system and clean excess dust/grime. Also ensure that the 220V/110V switch is in the correct position, if applicable.
No Light Output	Check to ensure fixture is operating under correct mode, IE sound active/auto/DMX/Etc., if applicable. Contact service for more information.
Chase Speed Too Fast/Slow	Check to ensure proper setup of speed adjustment.
No Power	Check fuse, AC cord and circuit for malfunction.
Blown Fuse	Check AC cord and circuit for damage, verify that moving parts are not restricted and that unit's ventilation is not obstructed
Slow Movement	Verify that 220V/110V switch is in the correct position, if applicable. Also check that speed channels are set appropriately.
No Response to Audio	Verify that the fixture is in "Sound Active" mode. Adjust Audio Sensitivity, If Applicable.
Fixture Not Responding / Responding Erraticly	Make sure all connectors are seated properly and securely. Use Only DMX Cables. Install a Terminator. Check all cables for defects. Reset fixture(s).
Fixture Moving On Its Own	Verify proper mode of operation. Is the fixture in "Auto" mode?

If your problem isn't listed, or if problems persist, please contact support: support@blizzardlighting.com.

5. APPENDIX

A Quick Lesson On DMX

DMX (aka DMX-512) was created in 1986 by the United States Institute for Theatre Technology (USITT) as a standardized method for connecting lighting consoles to lighting dimmer modules. It was revised in 1990 and again in 2000 to allow more flexibility. The Entertainment Services and Technology Association (ESTA) has since assumed control over the DMX512 standard. It has also been approved and recognized for ANSI standard classification.

DMX covers (and is an abbreviation for) Digital MultipleXed signals. It is the most common communications standard used by lighting and related stage equipment.

DMX provides up to 512 control "channels" per data link. Each of these channels was originally intended to control lamp dimmer levels. You can think of it as 512 faders on a lighting console, connected to 512 light bulbs. Each slider's position is sent over the data link as an 8-bit number having a value between 0 and 255. The value 0 corresponds to the light bulb being completely off while 255 corresponds to the light bulb being fully on.

DMX data is transmitted at 250,000 bits per second using the RS-485 transmission standard over two wires. As with microphone cables, a grounded cable shield is used to prevent interference with other signals.

There are five pins on a DMX connector: a wire for ground (cable shield), two wires for "Primary" communication which goes from a DMX source to a DMX receiver, and two wires for a "Secondary" communication which goes from a DMX receiver back to a DMX source. Generally, the "Secondary" channel is not used so data flows only from sources to receivers. Hence, most of us are most familiar with DMX-512 as being employer over typical 3-pin "mic cables," although this does not conform to the defined standard.

DMX is connected using a daisy-chain configuration where the source connects to the input of the first device, the output of the first device connects to the input of the next device, and so on. The standard allows for up to 32 devices on a single DMX link.

Each receiving device typically has a means for setting the "starting channel number" that it will respond to. For example, if two 6-channel fixtures are used, the first fixture might be set to start at channel 1 so it would respond to DMX channels 1 through 6, and the next fixture would be set to start at channel 7 so it would respond to channels 7 through 12.

The greatest strength of the DMX communications protocol is that it is very simple and robust. It involves transmitting a reset condition (indicating the start of a new "packet"), a start code, and up to 512 bytes of data. Data packets are transmitted continuously. As soon as one packet is finished, another can begin with no delay if desired (usually another follows within 1 ms). If nothing is changing (i.e. no lamp levels change) the same data will be sent out over and over again. This is a great feature of DMX -- if for some reason the data is not interpreted the first time around, it will be re-sent shortly.

Not all 512 channels need to be output per packet, and in fact, it is very uncommon to find all 512 used. The fewer channels are used, the higher the "refresh" rate. It is possible to get DMX refreshes at around 1000 times per second if only 24 channels are being transmitted. If all 512 channels are being transmitted, the refresh rate is around 44 times per second.

In summary, since its design and evolution in the 1980's DMX has become the standard for lighting control. It is flexible, robust, and scalable, and its ability to control everything from dimmer packs to moving lights to foggers to lasers makes it an indispensable tool for any lighting designer or lighting performer.

Keeping Your ICE 60 As Good As New

The fixture you've received is a rugged, tough piece of pro lighting equipment, and as long as you take care of it, it will take care of you. That said, like anything, you'll need to take care of it if you want it to operate as designed. You should absolutely keep the fixture clean, especially if you are using it in an environment with a lot of dust, fog, haze, wild animals, wild teenagers or spilled drinks.

Cleaning the optics routinely with a suitable glass cleaner will greatly improve the quality of light output. Keeping the fans free of dust and debris will keep the fixture running cool and prevent damage from overheating.

In transit, keep the fixtures in cases. You wouldn't throw a prized guitar, drumset, or other piece of expensive gear into a gear trailer without a case, and similarly, you shouldn't even think about doing it with your shiny new light fixtures.

Common sense and taking care of your fixtures will be the single biggest thing you can do to keep them running at peak performance and let you worry about designing a great light show, putting on a great concert, or maximizing your client's satisfaction and "wow factor." That's what it's all about, after all!

Returns (Gasp!)

We've taken a lot of precautions to make sure you never even have to worry about sending a defective unit back, or sending a unit in for service. But, like any complex piece of equipment designed and built by humans, once in a while, something doesn't go as planned. If you find yourself with a fixture that isn't behaving like a good little fixture should, you'll need to obtain a Return Authorization (RA).

Don't worry, this is easy. Just send an email to support@blizzardlighting.com, and we'll issue you an RA. Then, you'll need to send the unit to us using a trackable, pre-paid freight method. We suggest using USPS Priority or UPS. Make sure you carefully pack the fixture for transit, and whenever possible, use the original box & packing for shipping.

When returning your fixture for service, be sure to include the following:

- 1.) Your contact information (Name, Address, Phone Number, Email address).
- 2.) The RA# issued to you
- 3.) A brief description of the problem/symptoms.

We will, at our discretion, repair or replace the fixture. Please remember that any shipping damage which occurs in transit to us is the customer's responsibility, so pack it well!

Shipping Issues

Damage incurred in shipping is the responsibility of the shipper, and must be reported to the carrier immediately upon receipt of the items. Claims must be made within seven (7) days of receipt.

Tech Specs!

Weight & Dimensions	
Length	9 inches (229 mm)
Width	9.5 inches (241 mm)
Height	13.75 inches (349 mm)
Weight	16.3 lbs (7.39 kg)
Power	
Operating Voltage	110-240VAC, 50-60 Hertz (autoranging)
Fuse	2A 250V (fast-blow)
Power Consumption	135W @ 120VAC, .9A (inrush), 1.73A (max), .65 power factor
Light Source	
LED	1x60W Luminus LED 50,000 hours
Optical	
Beam Angle	14 degrees
Luminous Intensity	29,890 (full white) lux/1m 7,500 (full white) lux/2m
Gobo Size	22.0mm outside, 20mm image, 1.2mm max thickness
Movement Range	
Pan	540 degrees max.
Tilt	270 degrees max.
Thermal	
Max. Operating Temp.	104 degrees F (40 degrees C) ambient
Control	
Protocol	USITT DMX-512
DMX Channels	10/14 (User Switchable)
Input	3-pin XLR Male
Output	3-pin XLR Female
If I could meet any person it would be...	
Robbie Van Winkle	
Warranty	2-year limited warranty, does not cover malfunction caused by damage to LED's.



**Enjoy your product!
Our sincerest thanks for your purchase!
--The team @ Blizzard Lighting**