
If you like this product then why not take a look at some of the other items available from



OCTOPUS

32 multicoloured beams rotate back and forth to the beat of the music...







COMET

52 multicolored beams rotate and cross slowly....... Great Atmosphere Creator!

ALIEN

12 colored laser sharp beams rotate 360° at a speed controlled by you...

Looks Incredible At Any Speed!



Remember if you're looking for lights – Ask for CHAUVET!



Silver Power Panel

PC-09 Users Guide

Please read these instructions carefully before use

World-wide Headquarters:


3000 North 29th Ct., Hollywood, Florida, USA, FL 33020 Tel: +1-954-929-1115 Fax: +1-954-929-5560

European Office:

Unit 18, Hunslet Trading Estate, Leeds, UK LS10 1BL

Tel: (0113) 276-0755 Fax: (0113) 277-6675

www.ChauvetLighting.com

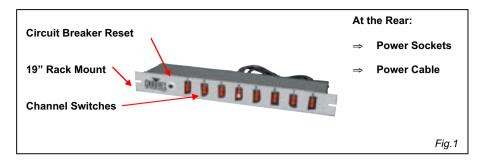

Introduction

Congratulations on the purchase of your new CHAUVET lighting controller. We are confident you will enjoy many trouble free hours with this unit. To assist with the care and use of the product we have prepared this short guide.

Operation

This lighting controller has been designed to function on a mains power supply of either 120V~60Hz or 230V~50Hz and has been fitted with a suitable power plug for use with your local voltage. Check the label on the unit and the power plug for the correct voltage.

The unit has been designed to independently switch on/off up to eight lighting fixtures via the power sockets at the rear. Simply plug each item into the appropriate socket using the appropriate power plug and away you go!

For your protection the power panel has been fitted with a 15A circuit breaker which will disconnect the main power supply to the outputs should you either overload the unit or if there is a power surge. In such circumstances it is necessary to press the reset button to re-activate the power to the controller.

Installation / Mounting

This controller may be used either seated on a level surface or mounted into an appropriate 19" (1U space required) rack cabinet. For reasons of safety it is best to secure the unit into a rack or suitable mounting so that cables cannot be pulled out of the panel.

Cleaning

The body of the unit may be cleaned with a soft damp cloth. We recommend internal cleaning be carried out by a fully qualified technician.

Maintenance & Servicing

Work on internal parts should be carried out by a qualified technician. Removal of any covers is considered a breach of warranty and will not be covered under any such agreement unless authorized first by the company.

Troubleshooting

- If the unit is not functional check main power supply is 'on' and check any fuses.
- If the unit continually trips the circuit breaker check the rating of the load and wiring. If after trying this solution you still have a problem contact your dealer or CHAUVET.

Caution

No user serviceable parts inside, please refer to CHAUVET for service.

Power Connections

The unit is supplied with a power plug appropriate to its voltage and destination. Should any other connections be required they must be carried out with the following configuration.

Earth = Green/Yellow cable Neutral = Blue cable Live = Brown cable

In the USA & Europe, it is required that all plugs are 3-pin type i.e. with Earth/Ground connection. In the UK, it is required that all mains plugs are fitted with 13A fuses.

Technical Specifications

Power	120V~60Hz AC 230V~50Hz AC	
Load Capacity	15A	15A (with suitable connector) 13A (with UK mains plug)
Circuit Breaker	15A Reset Switch 15A Reset Switch	
Power Outlets	8 x 120V (10A) 3-pin female	8 x 230V (10A) 3-pin IEC female
Dimensions	483 x 102 x 45mm / 19in x 4in x 1.75in	
Weight	2kg / 4.5lbs	

User Information (Please complete for your records)			
Date Purchased: / /		Serial No:	
Dealer Stamp:		<i>Model:</i> PC-09 SILVER POWER PANEL	