

Introduction

The DJtube™ 2.0 is a 39 inch LED lighting tube comprised of 30 each red, green and blue LEDs. The DJtube™ 2.0 randomly produces a vast array of colors in continuous chase patterns and the speed of chase can be adjusted on the individual tube. Its white diffused UV coated plastic housing allows for pleasant and aesthetic installation in various locations. Up to 40 tubes can be daisy chained from one power source. The DJtube™ 2.0 will enhance appearance on front boards, in club and stage installations. Perimeter, cove, display and accent lighting are other considerations for general use.

What is included

- 1 x DJtube™ 2.0 CH-110A
- 1 x Power cord (AC 120V)
- 1 x Instructions & Warranty Card

Assembly & Operation




Power Cord

1. Connect the power cord to the DJtube™ 2.0. The power input connector is a two pin male socket.
2. Plug power cord to an AC power outlet and you are done.

The DJtube™ 2.0 will begin to operate immediately after applying power. The built-in chase programs produce random colors. You may connect additional tubes in series.




Chase Speed Dipswitches

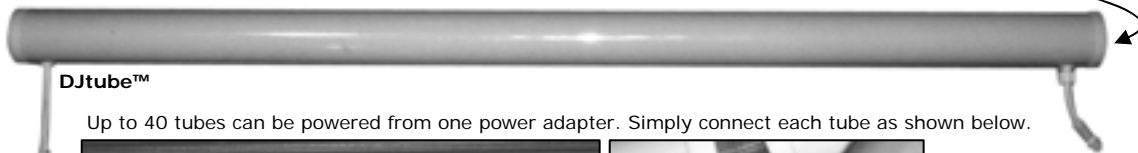

DJtube™

Up to 40 tubes can be powered from one power adapter. Simply connect each tube as shown below.

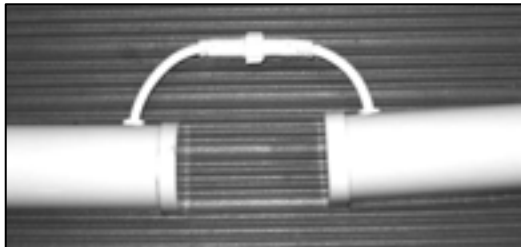

There are no user serviceable parts in this product.

Product intended for Indoor Use Only!

Specifications

Current draw	(peak 20.4W @ 120V), (inrush 22.8W @ 120V)
Power (US)	120V 60Hz
Power (Europe)	230V 50Hz
Max linkable quantity	40 tubes
Weight	3 lbs (1.36Kgs)
Shipping weight	4 lbs (1.81Kgs)
Individual size	3.74 in (95mm) x 2.95 in (75mm) x 40.2 in (1021mm)
Master packed	10pcs / 39.7 lbs (18Kgs)
Master pack size	7.48 in (190mm) x 14.8 in (376mm) x 40.3 in (1024mm)
Warranty	1-Year Limited Warranty